




Product Specifications

(SELENE LED BULKHEAD LIGHT)



The Selene LED Bulkhead Light offers an exceptional blend of performance and resilience for outdoor lighting needs. Designed with a focus on durability, it features an impact-resistant polycarbonate diffuser and an ABS housing, ensuring it can withstand harsh weather conditions with an IP65 protection rating. This outdoor bulkhead light is not only robust but also energy-efficient, saving over 70% in energy consumption compared to traditional lighting solutions. With various models offering different wattages and lumens, it provides versatile lighting options for any outdoor space. Supported by a comprehensive 5-year warranty, the Selene LED Light bulkhead light is a reliable and long-lasting choice for high-quality outdoor illumination.

Features


- UV and impact resistant polycarbonate diffuser;
- IP65 degree protection, adopt dust and moisture proof structure design;
- Saving more than 70% energy compared with traditional lighting fixtures;
- Packed with branded LEDs and power supply to ensure the product reliability and life expectancy;
- 5 years warranty.

Technical Specifications

Model No.	LGS-BL02-08W	LGS-BL02-12W	LGS-BL02-18W	LGS-BL02-24W	LGS-BL02-30W
Power	8W	12W	18W	24W	30W
Lumen Output	960lm	1,380lm	1,980lm	2,880lm	3,450lm
Lumen Efficiency	120lm/w	115m/w	110lm/w	120lm/w	115lm/w
Dimensions	D275*H90mm			D330*H100mm	
CCT	3000/4000/5000/5700/6500K				
CRI	Ra>80(Ra>90 optional)				
Light Decay Rate	Less than 3% in 6,000Hours				
Lifespan	≥50,000Hrs				
Input Voltage	220-240VAC 50/60Hz				
Power Factor	PF>0.9				
THD	<15%				
Driver Brand	Philips/Osram				
Material	ABS housing+Polycarbonate diffuser				
Degree of Protection	IP65				
Appearance	White				
Installation	Mounted				
Working Temperature	-30°C~+50°C				
Storage Temperature	-40°C~+70°C				
Certificate	CE, RoHS				
Warranty	5 years				
Optional Functions	Dimming on Request				

Measures

Unit: mm

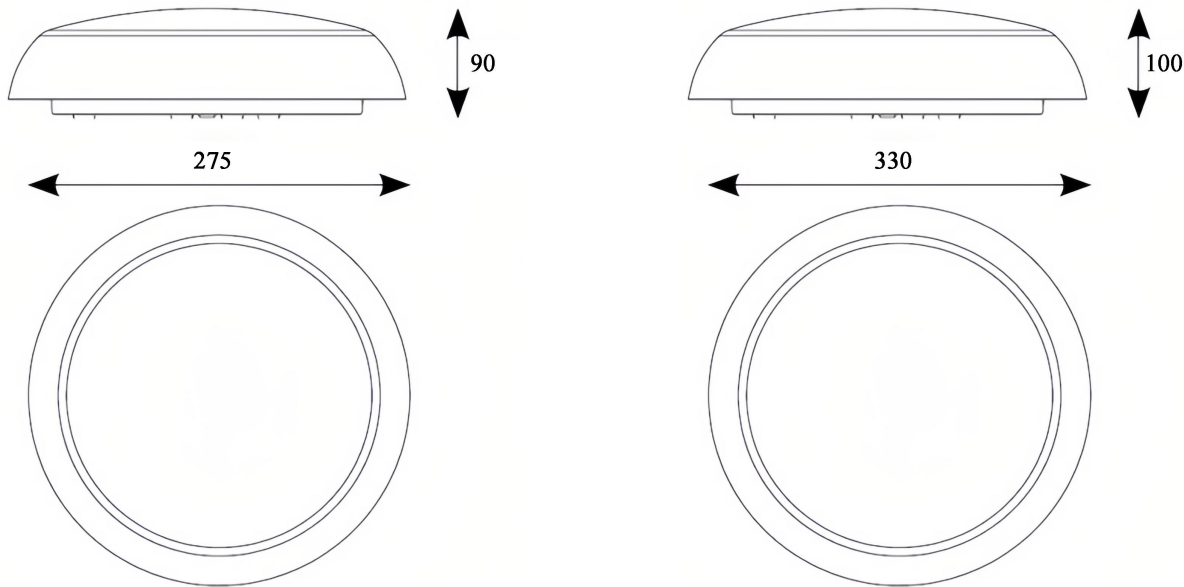

Installation Requirements

1. Power off before installation, and read the instruction carefully;
2. Make sure the installation material can endure the lamp weight;
3. Connect lamp wire to match power wire, and seal the joint with insulation;
4. The lamp must be installed reliably to prevent loosening and falling off.

Notice

1. Please first read the product specification carefully, make sure the using environment conform to specification, then it can be used;
2. Please confirm the input voltage, frequency before use;
3. This product must be installed by professionals;
4. If there is any damage to the power wire or shell of the product, it should be taken as defective product and do not use it;
5. Dangerous high voltage, non-professionals are not allowed to maintain the product;
6. If external soft cable or soft wire of the light is damaged, it should be replaced by manufacturer or service agent or personnel with similar qualification to avoid danger.